

DÖVME ÇELİK, SOKET MANŞON



3000 LB & 6000 LB
ANSI B 16.11




E.M.P.
www.emp.com.tr
www.empflans.com

FORGED SOCKET WELDING COUPLING



3000 LB & 6000 LB
ANSI B 16.11

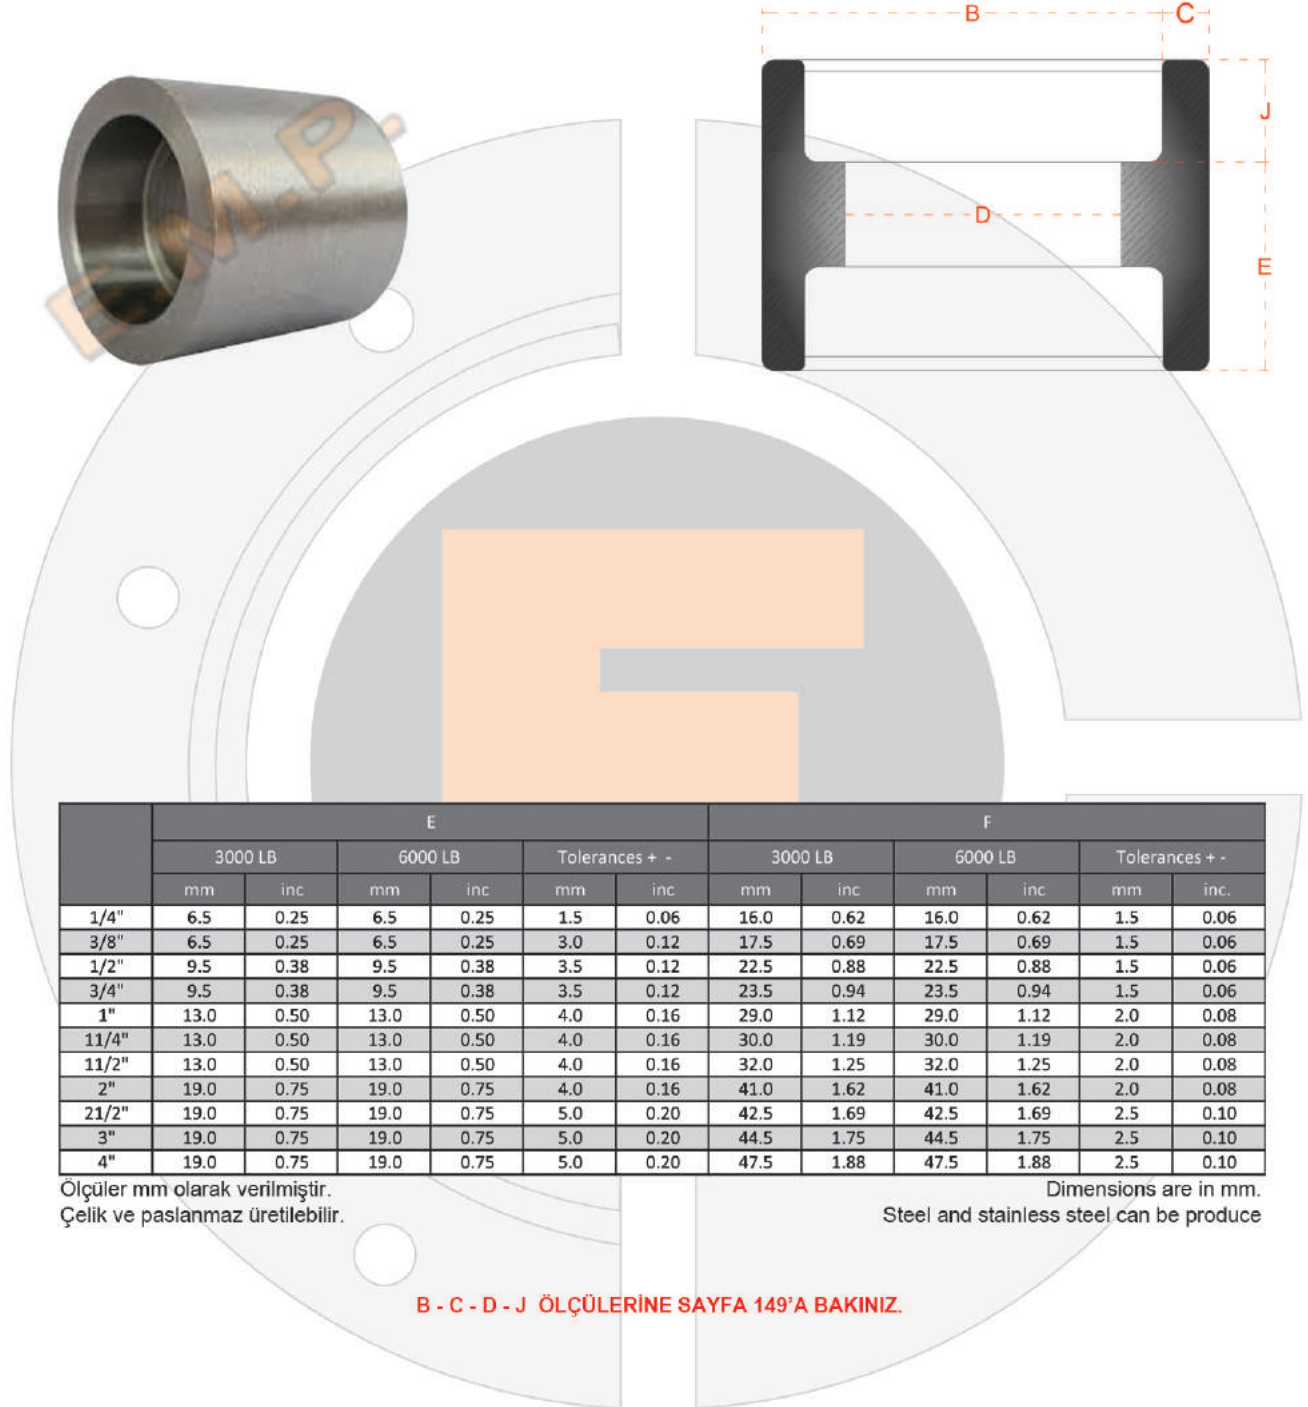

	E						F					
	3000 LB		6000 LB		Tolerances + -		3000 LB		6000 LB		Tolerances + -	
	mm	inc	mm	inc	mm	inc	mm	inc	mm	inc	mm	inc.
1/4"	6.5	0.25	6.5	0.25	1.5	0.06	16.0	0.62	16.0	0.62	1.5	0.06
3/8"	6.5	0.25	6.5	0.25	3.0	0.12	17.5	0.69	17.5	0.69	1.5	0.06
1/2"	9.5	0.38	9.5	0.38	3.5	0.12	22.5	0.88	22.5	0.88	1.5	0.06
3/4"	9.5	0.38	9.5	0.38	3.5	0.12	23.5	0.94	23.5	0.94	1.5	0.06
1"	13.0	0.50	13.0	0.50	4.0	0.16	29.0	1.12	29.0	1.12	2.0	0.08
1 1/4"	13.0	0.50	13.0	0.50	4.0	0.16	30.0	1.19	30.0	1.19	2.0	0.08
1 1/2"	13.0	0.50	13.0	0.50	4.0	0.16	32.0	1.25	32.0	1.25	2.0	0.08
2"	19.0	0.75	19.0	0.75	4.0	0.16	41.0	1.62	41.0	1.62	2.0	0.08
2 1/2"	19.0	0.75	19.0	0.75	5.0	0.20	42.5	1.69	42.5	1.69	2.5	0.10
3"	19.0	0.75	19.0	0.75	5.0	0.20	44.5	1.75	44.5	1.75	2.5	0.10
4"	19.0	0.75	19.0	0.75	5.0	0.20	47.5	1.88	47.5	1.88	2.5	0.10

Ölçüler mm olarak verilmiştir.
Çelik ve paslanmaz üretilebilir.

Dimensions are in mm.
Steel and stainless steel can be produce

B - C - D - J ÖLÇÜLERINE SAYFA 149'A BAKINIZ.